

# Pro 324



**Code: 1110805**

## Detailed Specifications

Input Voltage	: 230Vac	: 230Vac
Battery Voltage	: 12Volt	: 24 Volt
Current Selector	: 6	: 6
Switch Position	: Battery Charge	: Battery Charge
Switch Position	: <b>LOW</b>	: <b>LOW</b>
Input Current	: 3A a.c.	: 6,9A a.c.
Output Voltage	: 12V d.c.	: 24V d.c.
Output Current	: 37 A d.c.	: 44A d.c.
Switch Position	: <b>HIGH</b>	: <b>HIGH</b>
Input Current	: 4,5A a.c.	: 9,5A a.c.
Output Voltage	: 12,5V d.c.	: 25V d.c.
Output Current	: 49 A d.c.	: 54A d.c.
Min Battery Capacity	: 35Ah	: 35Ah

Dimensions (WxHxL) : 260/540/220 mm Without Handle  
 Dimensions (WxHxL) : 260/840/220 mm With Handle  
 Dimension WIDTH is front view  
 Weight Nett / Gross : 17 / 17,5 Kg

In the interest of product improvement, specifications may change without notice.

**Manufactured in South Africa**




## Features

This powerful combination engine starter and battery charger is an updated version of the well-known Pro 224 bringing it closer to the performance of the top of the range Pro 524. The PRO 324 will deliver an engine start aid of 300A c.c. and is capable of charging 12V and 24V batteries. Selection is made by connecting the charging cable to either the 12V stud or 24V stud on the top panel.

The transformer is protected by an automatic reset thermal circuit breaker. . The manual reset circuit breaker fitted to the top panel protects against incorrect polarity or too high a charging current. Two rocker switches allow for both BATTERY CHARGE / ENGINE START and HIGH / LOW charging selection. A 6 position rotary switch allows incremental selection of the charge current. NOT RECOMMENDED FOR SEALED BATTERIES

The Pro Series of chargers were designed in compliance with IEC 335-2-2 and has a two year limited warranty against defects in materials and workmanship.

- \* Conforms to SABS IEC 335-2-29
- \* Thermal overload protection
- \* Automatic circuit breaker protection
- \* Robust , epoxy coated steel cabinet
- \* Two year warranty
- \* Manufactured in South Africa
- \* Replaceable fuse protection on output side

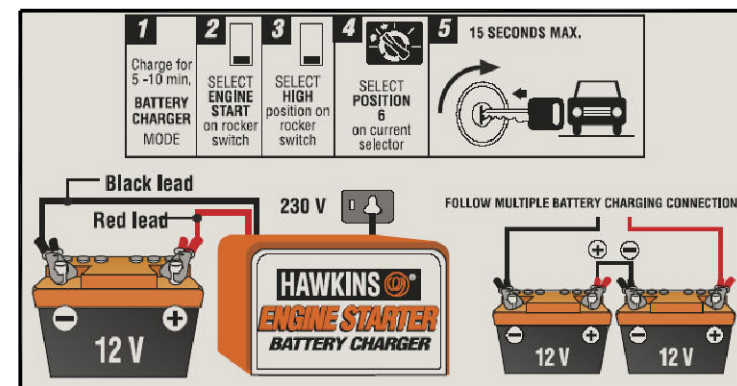

**HAWKINS**   
 MANUFACTURING (Pty) LTD

**BATTERY CHARGERS AND INVERTERS**

Tel: (031) 579-2813

Fax: (031) 579-4642

e mail: [info@hawkins.co.za](mailto:info@hawkins.co.za)

Web Site: [www.hawkins.co.za](http://www.hawkins.co.za)



T-0390-000-R01 - PRO 324.pdf