



Power 8

Features

The Hawkins range of domestic battery chargers is intended to meet market requirements for low cost automotive battery chargers. These units are made from high quality materials and components. These chargers are designed for flooded lead acid batteries.

The Power 8 is a charger that delivers its rated current at the outset and then tapers slowly down as the battery reaches full charge. It will continue to trickle past the nominal 13,8V of the fully charged battery and must be monitored periodically. These chargers are not automatic and therefore not recommended for sealed batteries.

The Power range of chargers were designed in compliance with IEC 335-2-2 and has a two year limited warranty against defects in materials and workmanship.

- * Conforms to SABS IEC 335-2-29
- * Thermal overload protection
- * Automatic circuit breaker protection
- * Easy to follow instructions
- * Two year warranty
- * Manufactured in South Africa


Code: 1110315

Detailed Specifications

Rated Input Voltage	:	230V a.c.
Rated Input Current	:	0,34 A a.c.
Rated Output Voltage	:	12V d.c.
Rated Output Current	:	5,2A d.c.
Min Ah	:	20Ah
Dimensions (WxHxL)	:	190/95/85 mm
Dimension WIDTH is front view	:	
Weight Nett/Gross	:	1,8/1,95 Kg

In the interest of product improvement, specifications may change without notice.

Manufactured in South Africa

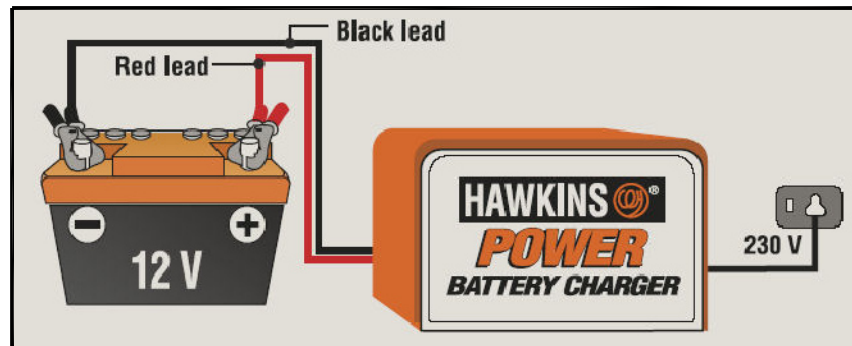

HAWKINS 
MANUFACTURING (Pty) LTD

BATTERY CHARGERS AND INVERTERS

Tel: (031) 579-2813

Fax: (031) 579-4642

e mail: info@hawkins.co.za

Web Site: www.hawkins.co.za



T-0300-000-R01 - Power 8.pdf